

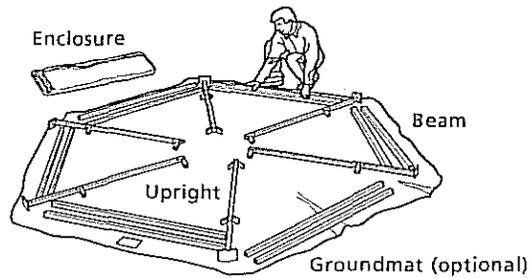


FASTANK® Assembly Instructions


Note : Choose a level area free from sharp objects. If windy, fabric enclosure in 3 should be held down with water before assembly.




1 . Unpack Contents and position pieces as shown.

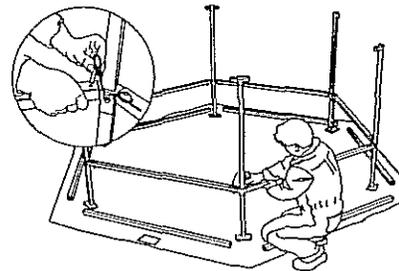


2 . Fix the bottom beam onto the upright and insert pin to lock. Repeat with all bottom beams

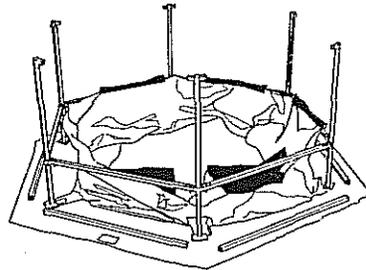

3 . Open fabric enclosure within frame.

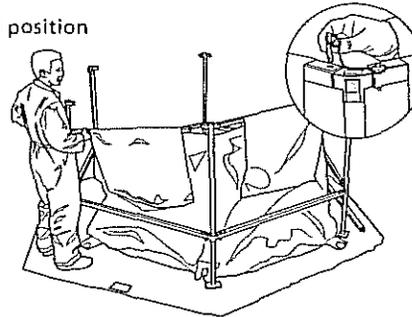

4 . Slide top beam under coloured fabric and connect one end to top of upright. Insert pin to lock, as in 2. Repeat to complete assembly.

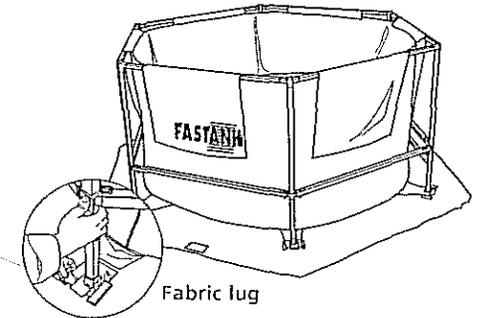


5 . Pull base of tank into circular shape, ensuring no wrinkles in the floor. Raise foot and loop lug strap into position as shown. Start filling tank, regularly check progress and ensure all fixings are secure.


FASTANK® Packaging Instructions

Note: Dismantling is the reverse of assembly.
Clean and dry components before storage.


- 6 . Remove top beams and foot straps to release enclosure



- 8 . Fold in both ends and fold enclosure to fit in bottom of carry bag. Replace instruction apron on top of enclosure in bag



- 7 . Fold enclosure as shown.
Smooth out creases in fabric.



- 9 . Remove bottom beams from frame.
Tie beams in two bundles and place on top of apron in bag. Secure upright into two bundles and place on top of beams. Fix with velcro straps inside carry bag. Seal bag and store in dry and secure environment.

